

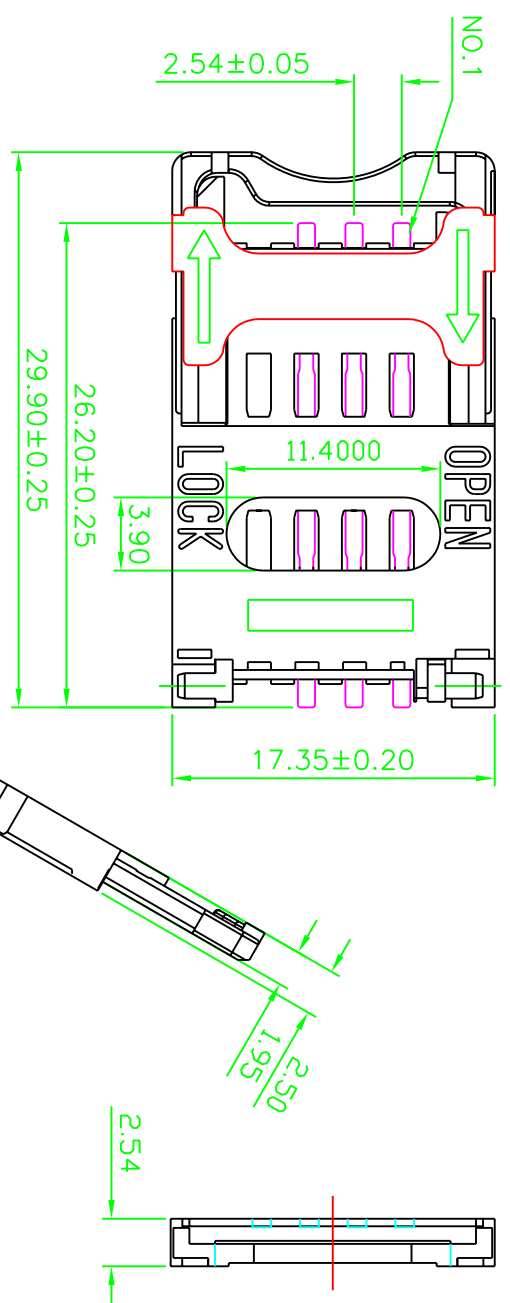


REV.	DESCRIPTION	DATE

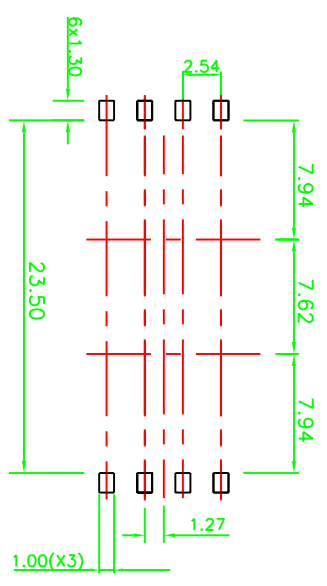

Specifications
 Current Rating: 1Amp
 Insulation Resistance: 10^3 M ohms
 Dielectric Withstanding: 250VAC
 Contact Resistance: 100m ohms.
 Operating Temperature: -40°C to +85°C
 Max Process Temp: 200°C for 20~30 sec.
 (230°C for 10-15seconds)

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

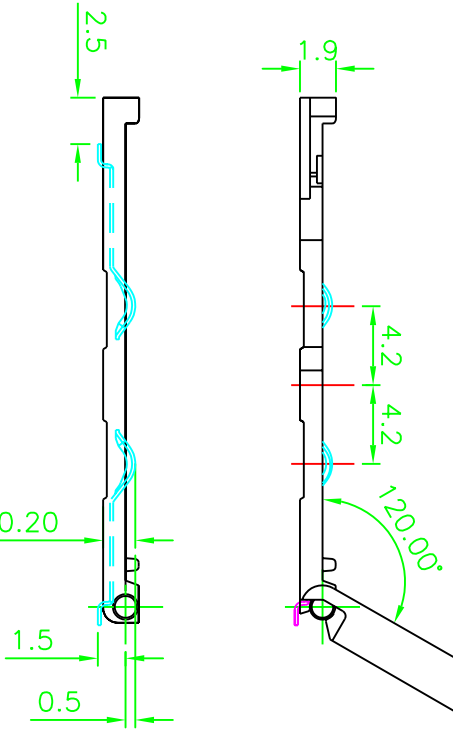

RECOMMENDED P.C. BOARD LAYOUT

格 菱 股 份 有 限 公 司
Greenconn Corporation

REV. 01	UNIT. mm	SCALE: 2.5:1	
GENERAL TOLERANCE			
X° ± 5°	X.	±	X.
.X° ± 2°	X	± 0.38	
.XX° ± 1°	.XX	± 0.25	
.XXX° ± 0.5°	.XXX	± 0.13	
DESIGN: XIAO PING	DATE: 04-15-05	DWG. NO. G ZN025-10	TITLE. SIM CARD
CHECKED:	DATE:	PART NO. G ZN025-100	組合圖
AUDITED:	DATE:		
APPROVED:	DATE:		