

**Features:**

- Shape: round
- diameter:26.0mm
- High visibility
- Emitting Color: red,green.
- No of Built-in 5mm LED Lamps :
- Ultra orange - 5pcs,green – 10pcs.
- Waterproof Package With Hood Suitable
- For Outdoor and Indoor Information Boards

**Selection Guide**

Part No.	Description
FYCL-R26AR5G10	26mm round Lamp cluster 5 red ,10 green,round packed

**Description:**

- Color Code & Chip characteristics: (Test Condition: IF=20mA)

Part No.	Built-in Lamp Package	Built-in Lamp Part No. FYL-	Chip		Lens Appearance	Electro-optical Data(At 20mA)			Viewing Angle 2 1/2 (deg)
			Material/ Emitted Color	Peak Wave Length p (nm)		Vf (V)		Iv (mcd)	
						Typ	Max	Typ	
FYCL- R26AR5G1 0	4x5x7mm 1.0" Lead Oval	5063UEC	AlGaInP/ Ultra Orange	630	Water clear	2.10	2.50	750	X-X 45 Y-Y 25
		5063GC	GaP/GaP/ Green	570	Water clear	2.20	2.50	200	

**Notes:**

1. 1/2 Is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

**Absolute Maximum Rating (Each Lamp, Ta=25 Derate above 25 )**


Characteristic	Symbol	Ultra Orang	Green	Unit
Spectral Line Half width		17	30	nm
Pulse Forward Current	IFp	150	150	mA
DC Forward Current	IF	30	30	mA
Reverse Current	IR	20	20	uA
Power Dissipature	PD	65	80	mW
Operating Temperature	Topr	-40 -80	-40 -80	
Storage Temperature	Tstg	-40 -85	-40 -85	
Lead Soldering Temperature		260+5	260+5	

**Notes:**


- 1.All dimensions are in millimeters(inches),Tolerance is +0.25(0.01) unless otherwise noted.
- 2.Specifications are subject to change without notice.

**Package configuration & Internal circuit diagram:**

**FYCL-R26A Series**

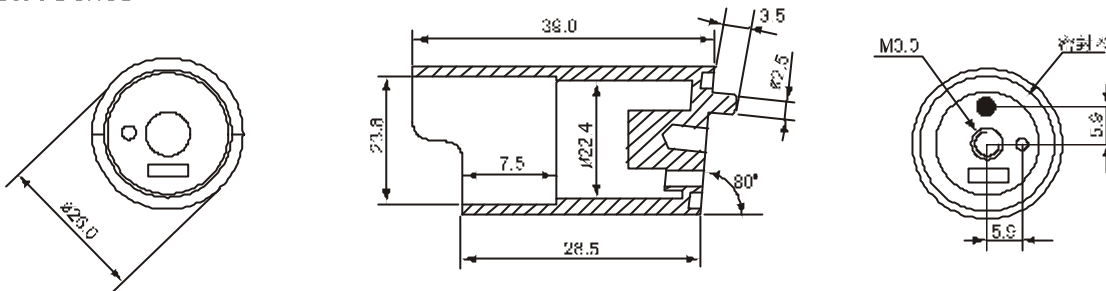

**FYCL-R26AR5G10**

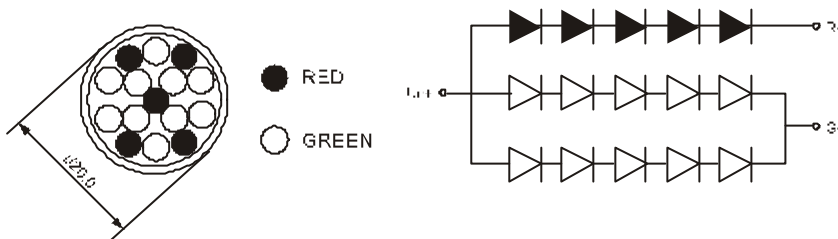

**Notes:**

- All dimensions are in millimeters (inches)
- Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
- Specifications are subject to change without notice.

**Electrical-optical characteristics: (Ta=25 )**

Parameter	Symbol	Ultra Orange	Green	Unit
Power Dissipation	$P_{ad}$	60	75	mW
Peak Forward Current*	$I_{pf}$	150	150	mA
Continuous Forward Current	$I_{af}$	25	30	mA


Notes:

- \* Test Condition = Duty 0.1,10KHZ


**Absolute maximum ratings (Ta=25 )**

Reverse Voltage	5V
Reverse Current	20 $\mu$ A
Operating Temperature Range	-40 to+85
Storage Temperature Range	-40 to+85
Lead Solder Temperature (1.6mm(1/16")from body)	230 for 5 Seconds


**Typical electrical-optical characteristics curves:**

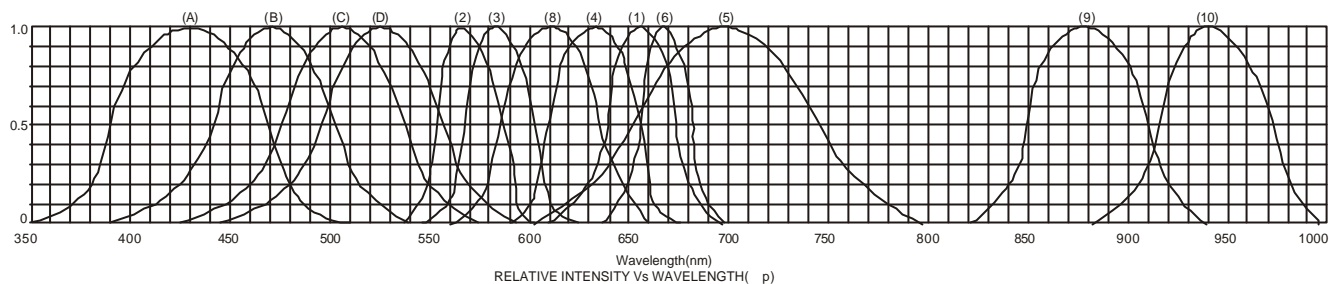


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAl/SiC 525nm/Ultra Green

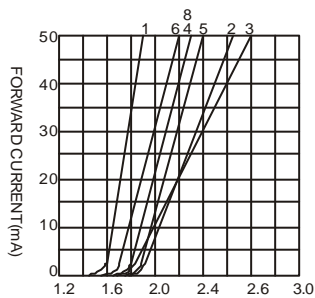


FORWARD CURRENT (mA)  
FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS. FORWARD VOLTAGE

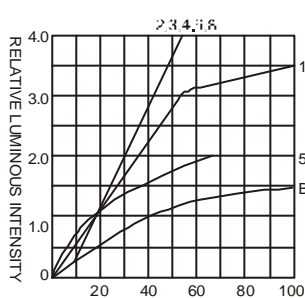


RELATIVE LUMINOUS INTENSITY  
FORWARD CURRENT (mA)  
RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

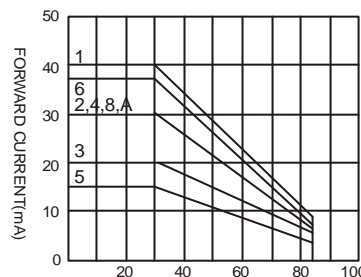

FORWARD CURRENT (mA)  
AMBIENT TEMPERATURE Ta ( °C)  
FORWARD CURRENT VS. AMBIENT TEMPERATURE

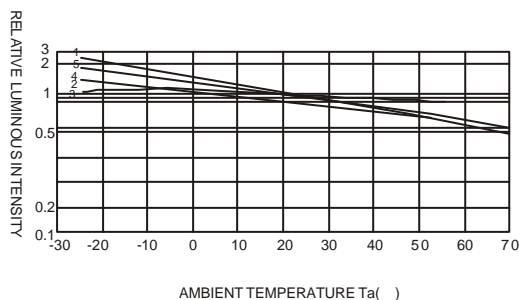


RELATIVE LUMINOUS INTENSITY  
AMBIENT TEMPERATURE Ta ( °C)

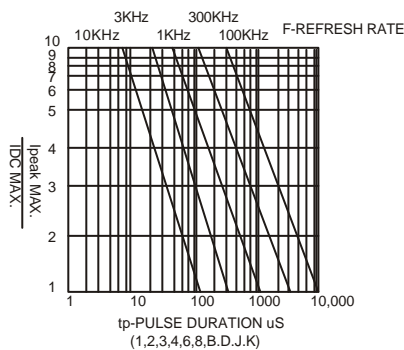

Ipeak MAX  
IDC MAX

tp-PULSE DURATION μs  
(1,2,3,4,6,8,B,D,J,K)

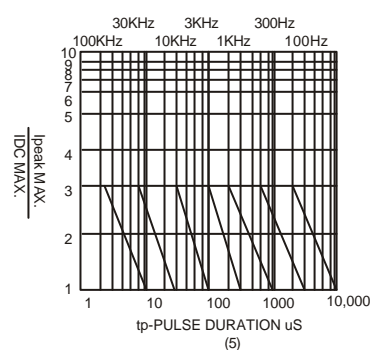

Ipeak MAX  
IDC MAX

tp-PULSE DURATION μs  
(5)

NOTE: 25 °C free air temperature unless otherwise specified