

SPECIFICATION

① **Product : Topview 5750 SMD LED**

② **Part No : IWS-506-RGB-K3**


③ **Customer :**

④ **Date : 2007. 1. 31 Ver.2.1**

Customer :

Checked By	Checked By	Checked By	Checked By	Approval

Manufacturer : ITSWELL Co., LTD

Proposed By	Checked By	Checked By	Checked By	Approval
				

Comment



Incheon Factory
 58B-4L 626-3 Gozan-dong Namdong-gu Incheon-city 405-817 KOREA
 Tel: 82-31-814-1972 FAX: 82-31-822-9009
 Ochang Factory & Head Office :
 363-880, 9-4Block, Ochang Scientific Industrial Complex, 1115-4 Namchon-ri, Oksan-myeon, Chengwon-gun, Chungbuk 363-911 Korea
 URL : www.itswell.com, TEL : int) 82-43-218-1800, FAX.: int) 82-43-218-1805

Topview 5750 SMD LED

IWS-506-RGB-K3




1. Features

- RGB 3-chip luminosity Chip LED
- 5.7 x 5.0 x 1.8 mm (L x W x H), 6-pin, small size surface mount type
- Wide Viewing angle
- Long operating life (up to 70,000 hours)


2. Applications

- Automotive: Backlight in dashboard and switch
- Lighting device: Indicator, lighting
- Camera flash, Hand Carrier Flash
- General use


3. Outline Drawing and Dimension

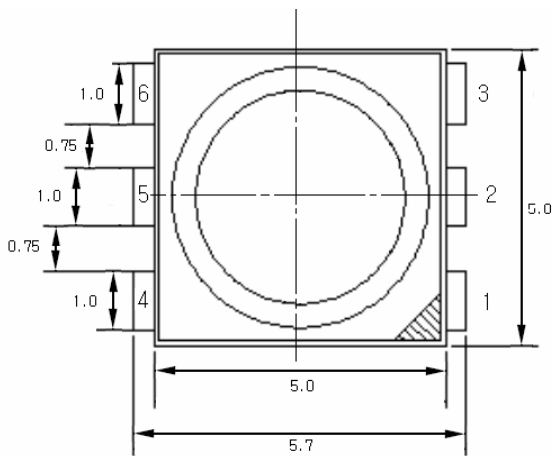

Unit : mm
Tolerance : ± 0.1 mm

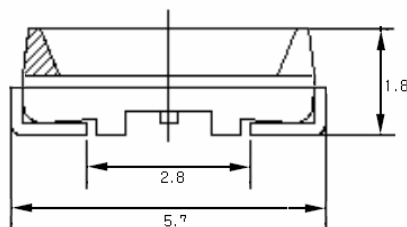

Circuit diagram

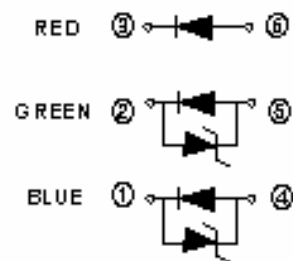

Note

1. All dimensions are in millimeters
2. All dimensions without tolerances are for reference only

Topview 5750 SMD LED

IWS-506-RGB-K3



4. Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Value			Unit
		Red	Green	Blue	
Power Dissipation	P_D	78	90	90	mW
Continuous Forward Current	I_F	30	30	30	mA
Peak Forward Current *1	I_{FP}	100	100	100	mA
Reverse Current	I_{ZR}	100			mA
Operating Temperature	T_{opr}	-30 ~ 85			°C
Storage Temperature	T_{stg}	-40 ~ 100			°C
Soldering Temperature	T_{sol}	260 (5sec)			°C

*1 Duty ratio = 1/10, Pulse width = 0.1ms

5. Electro-optical Characteristics(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.	
Forward Voltage*2	V_F	$I_F = 20\text{mA}$	Red	-	2.0	2.6	V
			Green	-	3.4	4.0	V
			Blue	-	3.4	4.0	V
Reverse Current	I_R	$V_R = 5\text{V}$	Red	-	-	10	uA
Reverse Voltage	V_{ZR}	$I_R = 5\text{mA}$	Green	0.7	-	1.5	V
			Blue	0.7	-	1.5	V
Dominant Wavelength*3	W_D	$I_F = 20\text{mA}$	Red	618	-	635	nm
			Green	520	-	535	nm
			Blue	455	-	475	nm
Luminous Intensity*4	I_v	$I_F = 20\text{mA}$	Red	-	500	700	mcd
			Green	-	900	1300	mcd
			Blue	-	300	500	mcd
View angle	$2\theta_{1/2}$	$I_F = 20\text{mA}$	-	-	120	-	deg

*2 Forward Voltage has an accuracy of $\pm 0.1\text{V}$

*3 Dominant wavelength has an accuracy of $\pm 1\text{nm}$

*4 Luminous Intensity is tested by a tester calibrated by CAS 140B(CIE LED_B) and has an accuracy of 10%

Topview 5750 SMD LED

IWS-506-RGB-K3



5.1 Luminous intensity Rank(mcd, $I_F = 20\text{mA}$)

RANK	RED	GREEN	BLUE
J			100 - 150
K	150 - 300		150 - 300
L	300 - 500		300 - 500
M	500 - 700	500 - 700	
N		700 - 900	
P		900 - 1100	
Q		1100 - 1300	

5.2 Dominant Wavelength Combination Rank(nm, $I_F = 20\text{mA}$)

RANK	RED	GREEN	BLUE
A	618 - 635	520 - 535	455 - 475

5.3 Forward Voltage Rank (V, $I_F = 20\text{mA}$)

RANK	RED	GREEN	BLUE
a	1.8 - 2.6	3.0 - 3.5	3.0 - 3.5
b		3.5 - 4.0	3.5 - 4.0

Topview 5750 SMD LED


IWS-506-RGB-K3




6. Typical Characteristics Curves

6.1 Red


Forward Current vs. Forward Voltage

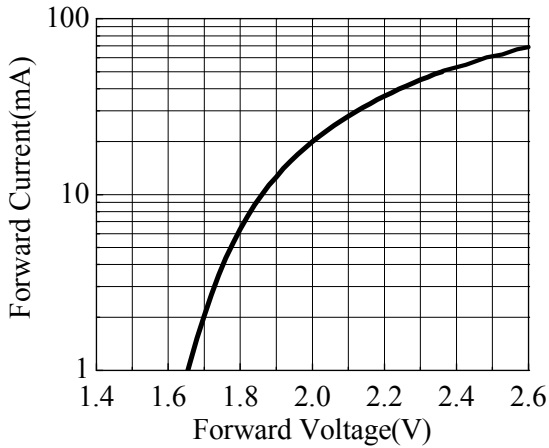


Forward Current vs. Ambient Temperature

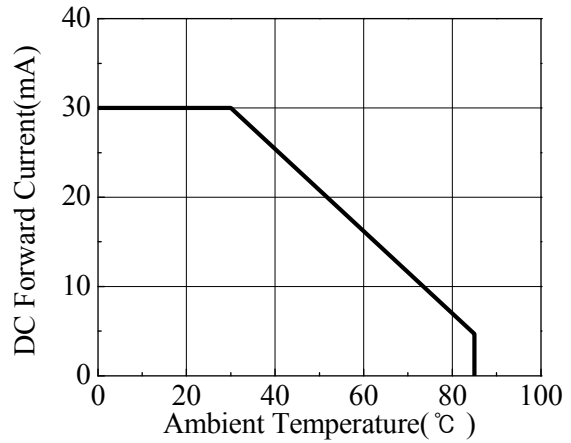


Relative Luminous Intensity vs. Ambient Temperature

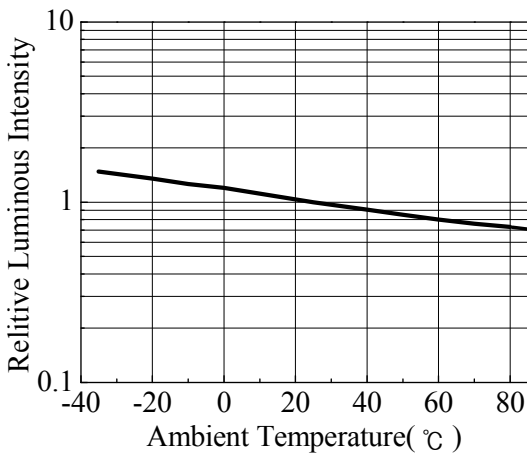


Relative Luminous Intensity vs. Forward Current

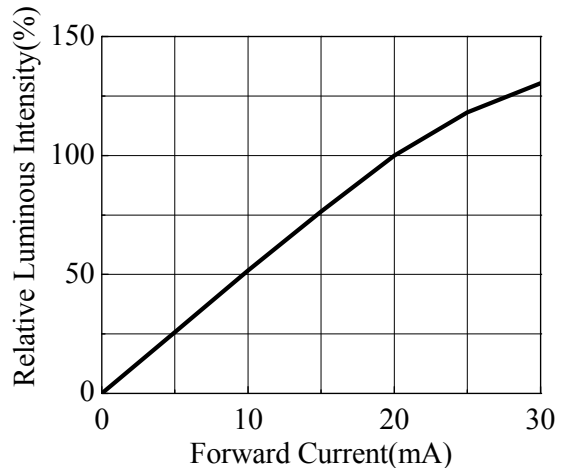

Relative Intensity vs. Wavelength

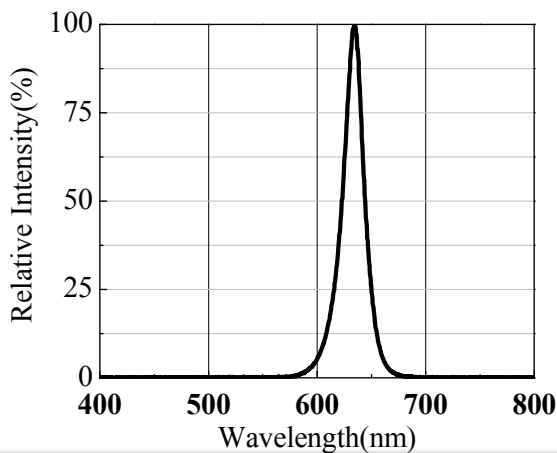

Radiation Diagram

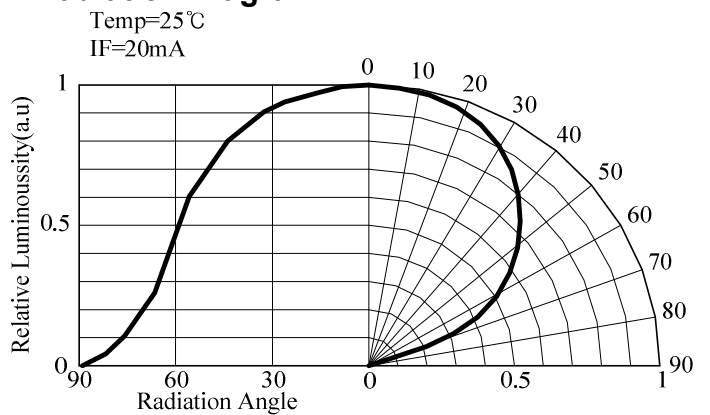


Topview 5750 SMD LED

IWS-506-RGB-K3




6.2 Green


Forward Current vs. Forward Voltage

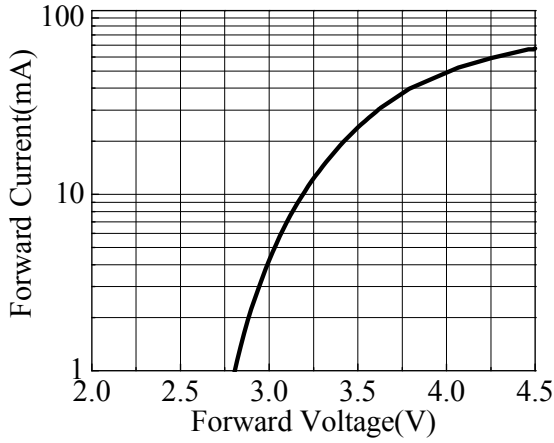


Forward Current vs. Ambient Temperature

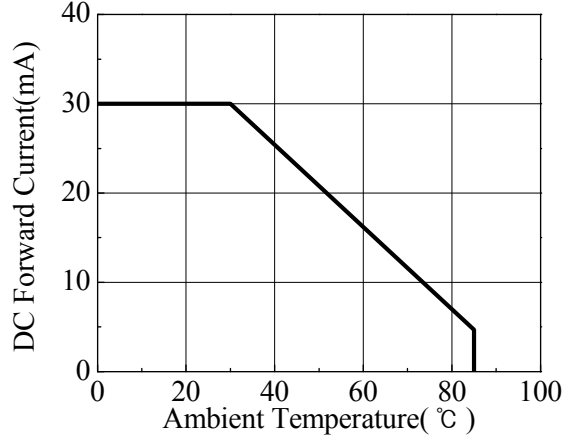


Relative Luminous Intensity vs. Ambient Temperature

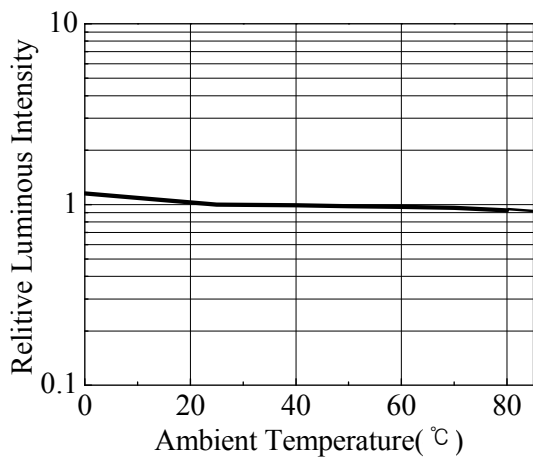


Relative Luminous Intensity vs. Forward Current

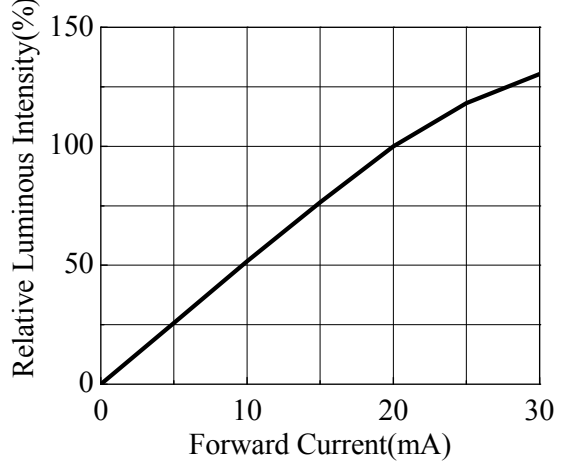

Relative Intensity vs. Wavelength

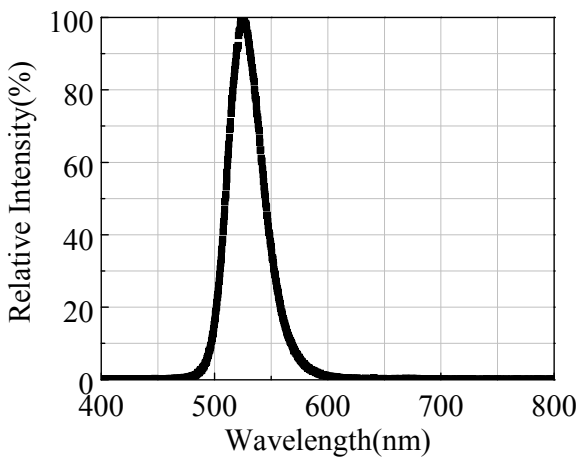

Radiation Diagram

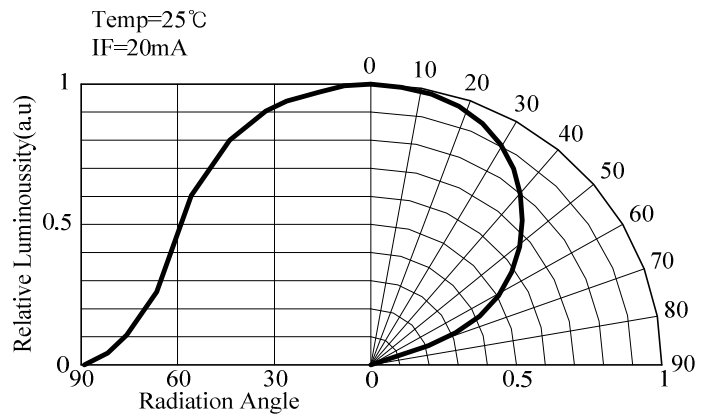


Topview 5750 SMD LED

IWS-506-RGB-K3




6.3 Blue


Forward Current vs. Forward Voltage

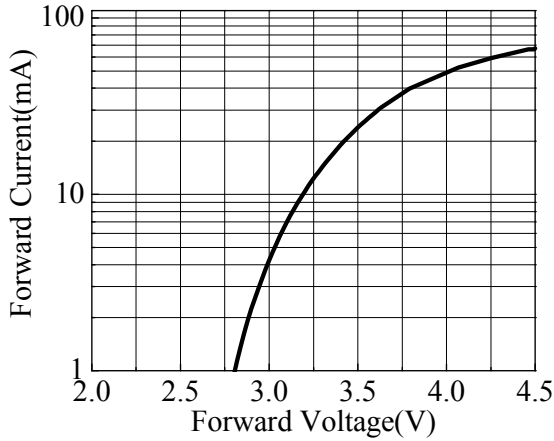


Forward Current vs. Ambient Temperature

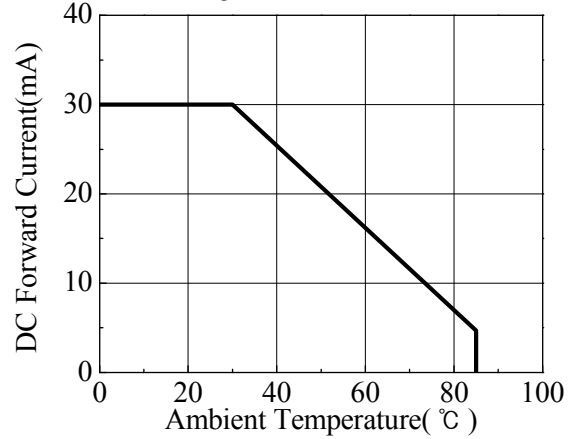


Relative Luminous Intensity vs. Ambient Temperature

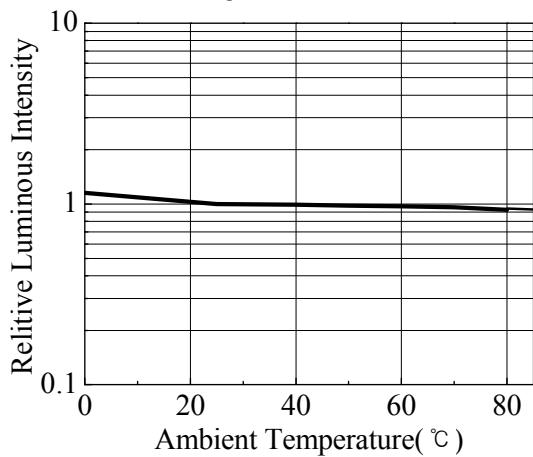


Relative Luminous Intensity vs. Forward Current

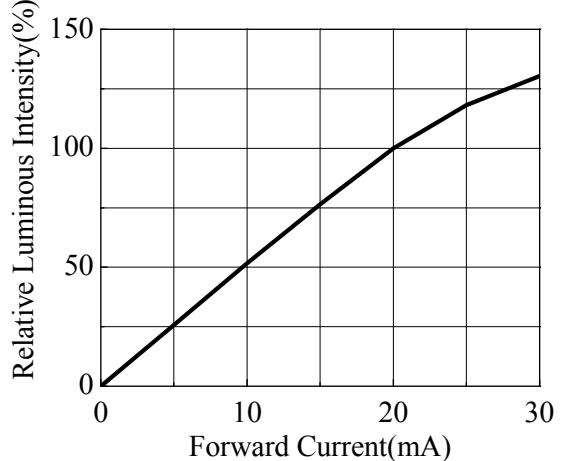

Relative Intensity vs. Wavelength

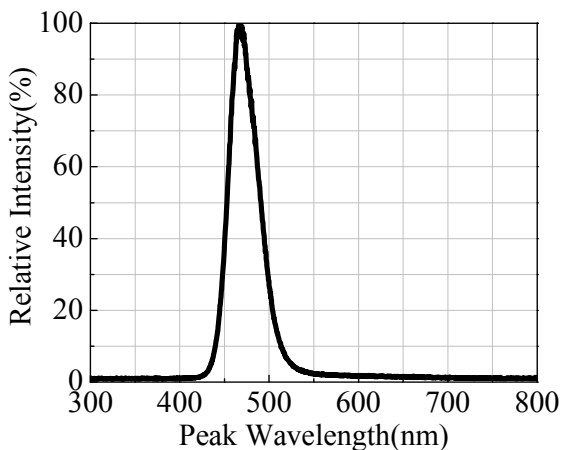

Radiation Diagram

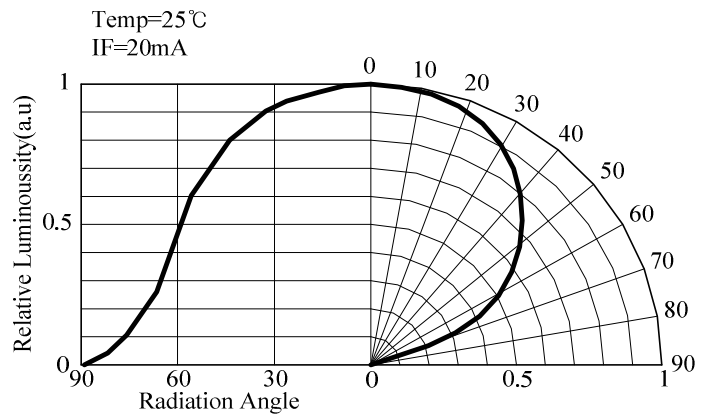


Topview 5750 SMD LED IWS-506-RGB-K3



7. Dimension of Tape / Reel


7.1 Tape Dimension

(Unit : mm)

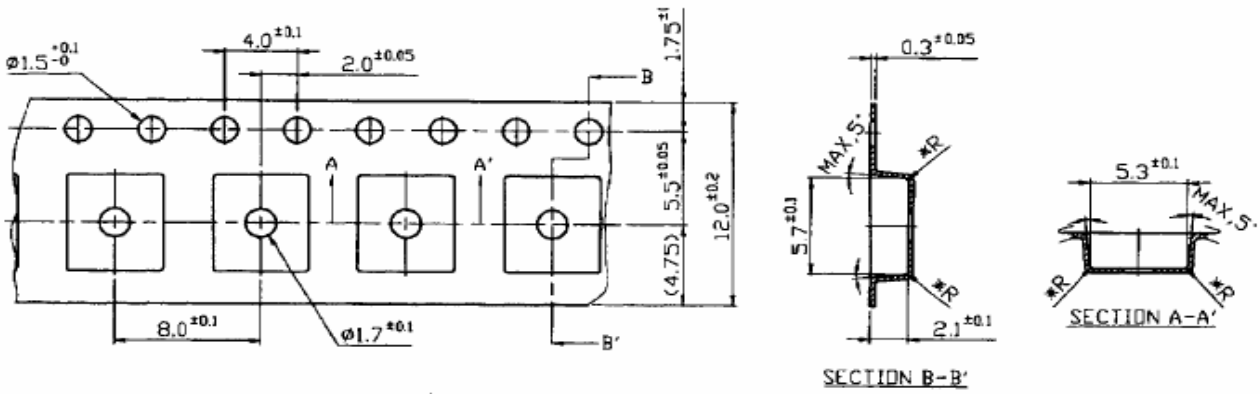

7.2 Reel Dimension

Unit : mm

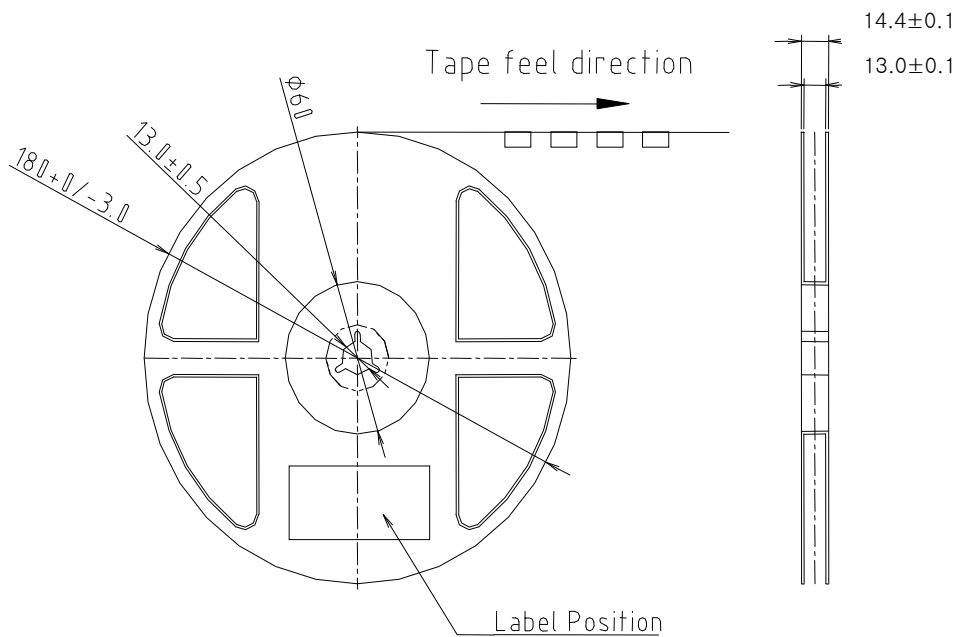


Topview 5750 SMD LED IWS-506-RGB-K3




8. Packing Dimension

Unit :mm

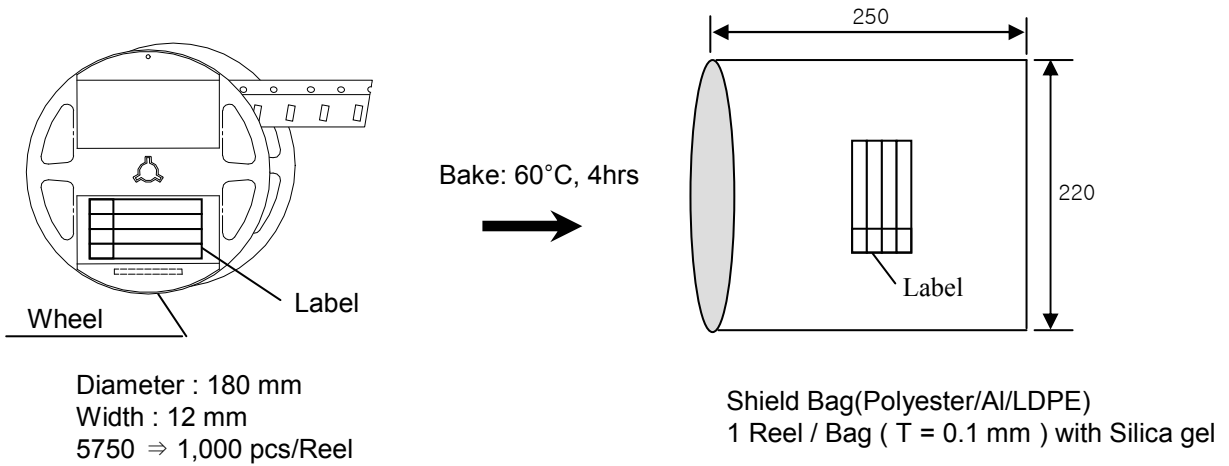

Al Pack & Reel Label, Box Label (70 × 37)

		RANK #		
Lot :		IWS-506-RGB-K3		
	MIN	AVG	MAX	STD
VF [volt]				
IV [mcd]				
WD [nm]				
Q'ty :		yyyy/mm/dd		

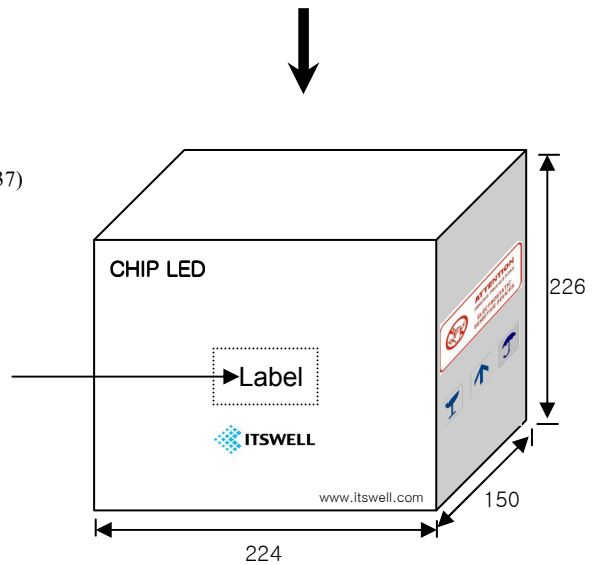


Maximum 10 Bags / 1 Inner Box
5750 ⇒ 8,000 pcs/ 1 Inner Box


9. Precaution in use

9.1 Soldering Conditions

- When soldering Power SMD, Heat may affect the electrical and optical characteristics of the LEDs.
- In soldering, do not stress the lead frame and the resin part under the high temperature.
- The silicone part should be protected from mechanical stress or vibration until the Power SMD return to room temperature after soldering.
- Preliminary heating to be at 200°C max. for 120 Seconds max.
- Soldering heat to be at 260°C max. for 5sec. Max.
- For manual Soldering is Not more than 3sec @MAX350°C, under soldering iron

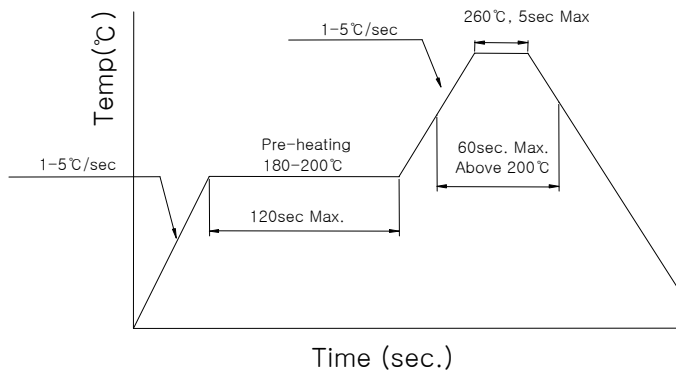

<Recommendable soldering pattern>

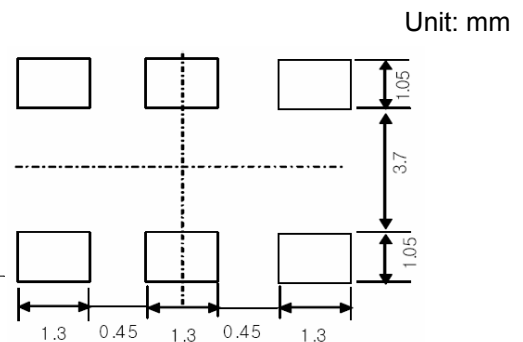

9.2 Storage

- Use within 7 days after opening packing. Store in 10 to 30 °C. Power SMD lead frames are plated silver. The silver surface may be affected by environment which contains corrosive gases and so on. Please avoid conditions which may cause the Power SMD to corrode, tarnish or discolor.

9.3 Static Electricity

- Static electricity or surge voltage damages the Power SMD. It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- A tip soldering iron is requested to be grounded. An ionizer should also be installed where there is a risk of static.
- All devices, equipment and machinery must be properly grounded (via 1MΩ). It is recommended that measures be taken against surge voltage to the equipment that mounts the Power SMD.

9.4 Cleaning

- Isopropyl Alcohol or Ethylene Alcohol is recommended for 5 minutes at room temperature. Don't use unspecified chemicals as they may cause cracks or haze on the surface of the epoxy resin.
- Before cleaning, a pre-test should be done to confirm whether any damage to the LED will occur.
- Freon solvents should not be used to clean the LEDs because of worldwide regulations.

Topview 5750 SMD LED

IWS-506-RGB-K3



10. Reliability

Each of RGB

Test Items	Test Conditions	Notes
High Temperature Storage	100 °C , 500 hr.	0/32
Low Temperature Storage	-40 °C , 500 hr.	0/32
Temp. Humidity Storage	60 °C , 90 % RH, 500 hr.	0/32
Steady State Operating life	25 °C , 30 mA , 500 hr.	0/32
High Temperature Operating Life	85 °C , 5 mA, 500 hr.	0/32
Low Temperature Operating Life	-30 °C , 30 mA, 300 hr.	0/32
Steady State Operating life Of High Humidity Heat	60 °C , 90 % RH, 10 mA, 300 hr.	0/32
Temperature Cycle	-40°C(30min) → 25(5min.) → 100(30min.) → 25(5min.), 100 cycle	0/22
ESD	HBM, 100pF, 1.5kohm, 3 times	0/22
Pressure Cooker Test	121 °C , 2 atm., 99.6 % RH 48 hr.	0/22

10.2 Criteria for Judging the Damage

Items	Test Conditions	Criteria for judgment
Luminous Intensity (I_V)	$I_F = 20$ mA	> 70% of S
Forward Voltage (V_F)	$I_F = 20$ mA	Less than 120% of U
Reverse Voltage (V_{ZR})	$I_R = 5$ mA	Less than 120% of U


* U means the upper limit of specified characteristics, S means initial value.

Topview 5750 SMD LED


IWS-506-RGB-K3



11. Part Name Description

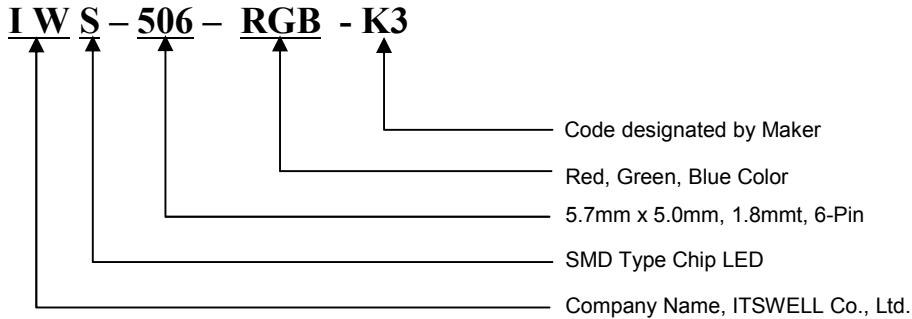

12. Rank Description

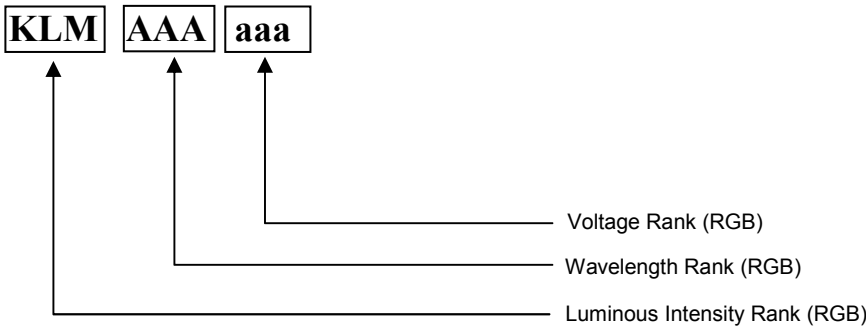

13. Attention : Electric Static Discharge (ESD) Protection



The symbol shown on the page herein to introduce 'Electro-Optical Characteristics'. ESD protection for GaP, AlGaAs and SiC is based chips is still necessary even though they are safe in low static-electric discharge. Material in AlInGaP, GaP, or/and InGaN based chips are STATIC SENSITIVE devices. ESD protection has to considered and taken in the initial design stage. If manual work/process is needed, please ensure the device is well protective From ESD during all the process. LED's ESD Level is 'Class II' and the range of forward voltage is 2000V ~ 3999V.

After opening the package, the LED's should be kept at 30°C, 70%RH or less. The LEDs must be dip soldered within seven days(168 hours) after opening the moisture-proof packing. It is better not to use different rank LEDs. If use mixed rank, could not attain your object for highest quality of products.

