



[TS-1107GS]

Typical Specifications




1. Rating : DC 12V 50mA
2. Circuit : 1C-1P
3. Travel : 0.25mm \pm R0.1
4. Operating Force : 130,180,250 \pm R30gf
5. Contact Resistance : 100m Ω Max
6. Operating Life : 50,000 Cycles




TS-1107GS

PART	MATERIAL
TERMINAL	BRASS
CASE	NYLON 46
CONTACT	STAINLESS STEEL
DUST COVER	POLYIMIDE
COVER	STAINLESS STEEL
STEM	NYLON 46

OUTLINE DRAWING

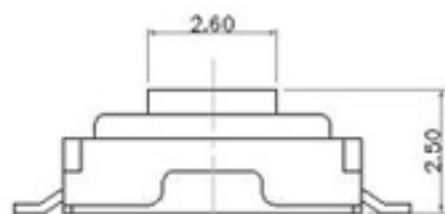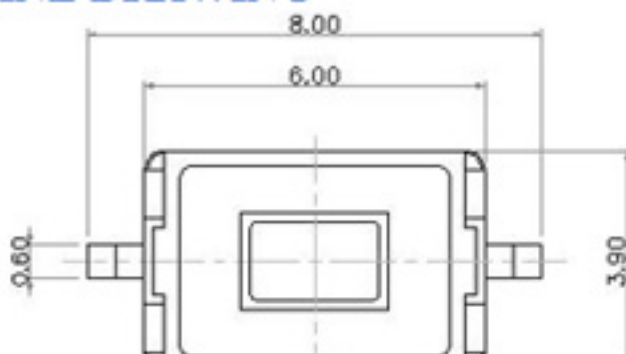

P.C.B LAND PATTERN

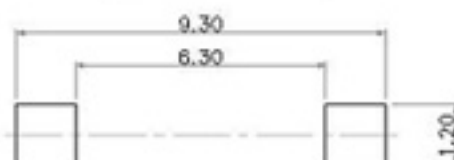

CIRCUIT DIAGRAM

